

Application

Control valve for hygienic applications in the food and pharmaceutical industries

Nominal size	DN 6 to 50 · NPS ¼ to 2
Maximum pressure	16 bar (40 bar) · 230 psi (580 psi)
Medium temperature	0 to 150 °C · 32 to 300 °F



Type 3347 Angle Valve with Type 3379 Pneumatic Actuator

- Valve body free of dead space made of cast stainless steel
- Wetted sealing materials comply with FDA regulations
- Metal or soft-seated valve plug
- Easily detachable clamp connection between body and bonnet
- Suitable for cleaning-in-place (CIP)

PTFE seals are used to seal body and bonnet as well as bonnet and plug stem. An additional steam line connection is available for stricter purity requirements.

The control valves used in combination with the Type 3724 Positioner form a compact automated unit.

Versions

Valves with welding ends for pipes according to DIN 11850, ISO 2037, BS 4825, AFNOR with internal surfaces turned to a fine finish and metal-seated plugs for medium temperatures between 0 and 150 °C (32 to 300 °F) and Type 3379 Actuator optionally with Type 3724 Positioner

Version with cast body (Fig. 1)

- DN 25 to 50 · NPS 1 to 2
- Maximum 16 bar (230 psi), see Table 1.3

Version with bar stock body

- DN 15 to 50 · NPS ¼ to 2
- Maximum 16 bar (230 psi), see Table 1.3
- With EHEDG certification

Version with bar stock body and flanged-on bonnet

- DN 6 to 50 · NPS ¼ to 2
- Maximum 40 bar (580 psi), see Table 1.3

Micro-flow valve version (bar stock)

- DN 6 to 15 · NPS ¼ to ½
- Maximum 40 bar (580 psi), see Table 1.3

Further versions

- **Polished valve body** (internal and/or external surfaces)
- **Threaded couplings** according to DIN 11887 (11851), SMS or IDF



Fig. 1: Compact automated unit with Type 3347/3379 Control Valve with welding ends, cast body (with Type 3724 Positioner)

- **Clamp connection** · ISO 2852-2, DIN 32676 or BS 4825
- **Flanges** with smooth raised face, connecting dimensions acc. to DIN EN 1092-1
- **Valve plug made of 1.4435** · In conjunction with valve body made of 1.4435 and as standard for micro-flow valve version
- Valve plug with **soft seal**
- **V-port plug**
- **Stellite-faced seat** · Recommended for valves with welding ends and for micro-flow valve version

- **Steam line connection** (not compliant with EHEDG regulations), see Fig. 5
- Bar stock version with **body and plug made of 1.4435** as well as other materials on request
- **Chrome-plated plug stem and metal centering ring**
- **Heating jacket** · Details on request
- **Type 3724 Positioner** · Data Sheet ► T 8395

Principle of operation

The process medium flows through the valve in the direction indicated by the arrow in the flow-to-open direction. A PTFE seal is used to seal the plug stem.

An optional steam or sterile fluid line connection (Fig. 5) for sterilization of the plug stem is available.

In versions with clamp connection, the entire valve bonnet can be easily detached from the body.

Mounting position

The valve must be installed in the upright position with the actuator on top.

Actuator

The valve comes with the Type 3379 Pneumatic Actuator together with the Type 3724 Positioner to form a compact automated unit.

Fail-safe position

Depending on how the compression springs are arranged in the pneumatic actuator, the valve has two fail-safe positions effective upon air supply failure:

- **Actuator stem extends (fail-close):** The valve closes when the supply air fails.
- **Actuator stem retracts (fail-open):** The valve opens when the supply air fails.

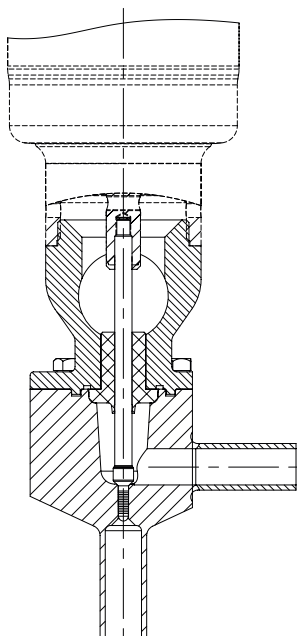


Fig. 2: Type 3347/3379 Control Valve with welding ends
Micro-flow valve version

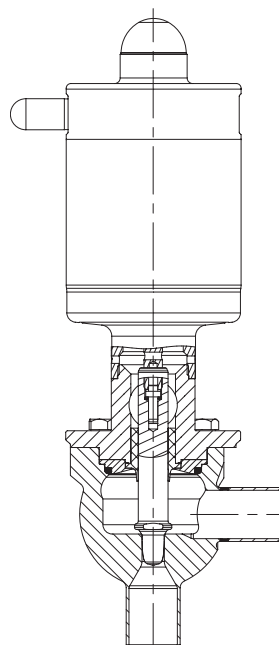


Fig. 3: Type 3347/3379 Control Valve with welding ends
Version with bar stock body with flanged-on bonnet

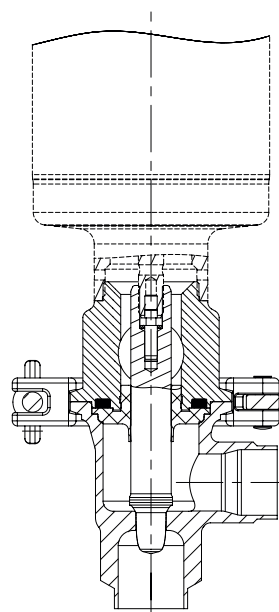


Fig. 4: Type 3347/3379 Control Valve with welding ends
Version with cast body

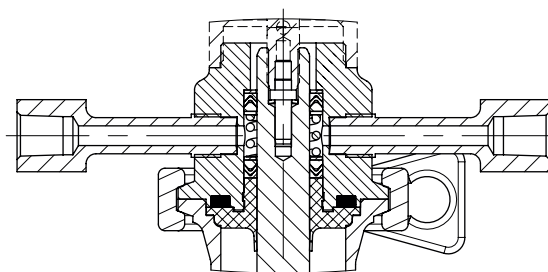


Fig. 5: Steam line connection

Table 1: Technical data**Table 1.1: Type 3347 Valve**

Body version ¹⁾		Cast	Bar stock		Micro-flow valve
Bonnet		Clamp connection	Clamp connection	Flange connection	Flange connection
Valve size		DN 25 to 50 NPS 1 to 2	DN 15 to 50 NPS ½ to 2		DN 6 to 15 NPS ¼ to ½
Maximum pressure (restrictions according to Table 1.3)		16 bar (230 psi)	16 bar (230 psi)	40 bar (580 psi)	16 bar (230 psi)
Seat/plug seal		Metal seal · Soft seal (not compliant with 3A regulations)			
Characteristic		Equal percentage or linear			
Rangeability		See Table 3			
Permissible medium temperature (restrictions according to Table 1.3)		0 to 150 °C (32 to 300 °F)			
Leakage class according to IEC 60534-4 or ANSI/ FCI 70-2	Metal seal	IV			
	Soft seal	VI			
Peak-to-valley height and surface finish	External	Glass bead blasted			
		R _a ≤ 0.6 µm · Polished			
	Internal	R _a ≤ 0.8 µm · Fine machine finish			
		R _a ≤ 0.6 µm · Polished			
		R _a ≤ 0.4 µm · Satin finish			
		R _a ≤ 0.4 µm · Mirror finish			
Compliance					

¹⁾ Suitable for Group 2 fluids according to European Pressure Equipment Directive 97/23/EC.

Table 1.2: Type 3379 Pneumatic Actuator

Piston diameter		mm	63				90							
Actuator area		cm²	31				63							
Rated travel		mm	15				15							
Permissible ambient temperature		°C (°F)	0 to 60 (32 to 140)											
Max. supply pressure		bar (psi)	8 (116)											
Hysteresis		bar (psi)	0.4 (5.8)				0.3 · 0.5 · 0.6 (4.4 · 7.3 · 8.7)							
Fail-safe position			Fail-close		Fail-open		Fail-close				Fail-open			
Number of springs			1		1		2		1		1		1	
Control pressure		bar (psi)	4 (58)		6 (87)		6 (87)		4.5 (65)		6 (87)		4 (58)	
Nominal range		bar (psi)	2.3 to 3.7 (33.4 to 53.7)		2.3 to 3.7 (33.4 to 53.7)		3.3 to 5.6 (47.9 to 81.2)		2.5 to 4.0 (36.3 to 58)		1.0 to 1.9 (14.5 to 27.6)		1.0 to 1.9 (14.5 to 27.6)	
Travel		mm	15	7.5	15	7.5	15	7.5	15	7.5	15	7.5	15	7.5
Thrust		N	720	930	720	930	2090	2670	1590	2030	2580	2830	1320	1570

Table 1.3: End connections and maximum pressures

The seals determine which maximum temperature applies.

Connection	StandardValve size DN/NPS			Version up to 16 bar (230 psi)		Version up to max. pressure when flanged valve bonnets are used ⁴⁾	
				Max. operating pressure in bar or psi at a medium temperature of			
				0 to 20 °C (32 to 68 °F)	150 °C (300 °F)	0 to 20 °C (32 to 68 °F)	150 °C (300 °F)
Welding ends	DIN 11866	Series A	DN 6 to 50	16 bar	13 bar	40 bar	34 bar
		Series B ²⁾	DN 10.2 to 60.3	16 bar	13 bar	40 bar	34 bar
		Series C ³⁾	NPS ¼ to 2	230 psi	174 psi	580 psi	438 psi
	DIN 11850	Series 2	DN 10 to 50	16 bar	13 bar	40 bar	34 bar
	ISO 2037		DN 10 to 50	16 bar	13 bar	40 bar	34 bar
	JIS G 3447		DN 25 to 50	16 bar	13 bar	40 bar	34 bar
	JIS G 3459		DN 6 to 50	16 bar	13 bar	40 bar	34 bar
Clamp connections	DIN 11864-3 Form A ¹⁾	Series A	DN 10 to 50	16 bar	13 bar	–	–
			DN 16 to 40	–	–	40 bar	34 bar
		Series B	DN 13.5 to 60.3	16 bar	13 bar	–	–
			DN 13.5 to 33.7	–	–	40 bar	34 bar
		Series C	NPS ½ to 2	230 psi	174 psi	–	–
			NPS ½ to 1½	–	–	580 psi	493 psi
	DIN 32676	Series A	DN 6 to 50	16 bar	13 bar	–	–
			DN 6 to 40	–	–	25 bar	21 bar
		Series B	DN 10.2 to 60.3	16 bar	13 bar	–	–
			DN 10.2 to 42.4	–	–	25 bar	21 bar
		Series C	NPS ¼ to 2	230 psi	174 psi	–	–
			NPS ¼ to 1½	–	–	360 psi	270 psi
	ISO 2852		DN 10 to 50	16 bar	13 bar	–	–
			DN 10 to 40	–	–	25 bar	21 bar
	ASME BPE		NPS ¼ to 2	230 psi	174 psi	–	–
			NPS ¼ to 1½	–	–	360 psi	270 psi
	BS 4825 Part 3		NPS 1 to 2	230 psi	174 psi	–	–
			NPS 1 to 1½	–	–	360 psi	270 psi
	OSS for pipes acc. to JIS G 3447		DN 25 to 50	16 bar	13 bar	–	–
			DN 25 to 40	–	–	25 bar	21 bar
	OSS for pipes acc. to JIS G 3459		DN 25 to 50	16 bar	13 bar	–	–
			DN 25 to 40	–	–	25 bar	21 bar
Threaded couplings	DIN 11864-1 Form A ¹⁾	Series A	DN 10 to 50	16 bar	13 bar	–	–
			DN 10 to 40	–	–	40 bar	34 bar
		Series B	DN 13.5 to 60.3	16 bar	13 bar	–	–
			DN 13.5 to 33.7	–	–	40 bar	34 bar
		Series C	NPS ½ to 2	230 psi	174 psi	–	–
			NPS ½ to 1½	–	–	580 psi	493 psi
	DIN 11887 connection A, Series 1 (DIN 11851)		DN 10 to 50	16 bar	13 bar	–	–
	ISO 2853 (IDF)		DN 25 to 51	16 bar	13 bar	–	–
SMS 1146		DN 25 to 51	6 bar	5.5 bar	–	–	
Flanges	DIN 11864-2 Form A ¹⁾	Series A	DN 10 to 50	16 bar	13 bar	–	–
			DN 10 to 40	–	–	25 bar	21 bar
		Series B	DN 13.5 to 60.3	16 bar	13 bar	–	–
			DN 13.5 to 33.7	–	–	25 bar	21 bar
		Series C	NPS ½ to 2	230 psi	174 psi	–	–
			NPS ½ to 1½	–	–	580 psi	493 psi

¹⁾ The medium temperature must not exceed 140 °C (284 °F).

²⁾ Also ISO 1127

³⁾ Also ASME BPE

⁴⁾ Only after consulting SAMSON. Valves with flanged-on bonnets are required for operating pressures > 16 bar (> 230 psi).

Table 2: Materials**Table 2.1: Type 3347 Valve with cast body and bar stock body**

		DIN	ANSI	AFNOR
Body version with lathed seat	Cast	Cast stainless steel 1.4409	CF3M	Z2 CND 17-12
	Bar stock	1.4404	316L	Z2 CND 17-12
Bonnet		1.4404	316L	Z2 CND 17-12
Plug		1.4404	316L	Z2 CND 17-12
Centering ring		1.4404	316L	Z2 CND 17-12
Terminal		1.4306	304L	Z3 CN 19-10
Body and stem seal		Pure PTFE		
Guide bushing		Pure PTFE		

Table 2.2: Micro-flow valve version of Type 3347

	DIN	ANSI	AFNOR
Body version with lathed seat	1.4435 Stellite-faced seat	316L Stellite-faced seat	Z2 CND 17-12 Stellite-faced seat
Bonnet	1.4404	316L	Z2 CND 17-12
Plug	1.4404	316L	Z2 CND 17-12
Stem seal	Pure PTFE		

Table 2.3: Type 3379 Pneumatic Actuator

Housing and cover	Stainless steel 1.4404/1.4409
Piston rod	1.4404
Piston	Polyamide, glass fiber reinforced
Dome (visual indicator)	Polycarbonate
Bearing	Polymer
Springs	Spring steel, powder coated
Seals	NBR

Table 3: K_{VS} coefficients and associated valve sizes for Type 3347 Valve

K _{VS}		0.01	0.016	0.025	0.04	0.063	0.1	0.16 ¹⁾	0.25	0.4 ¹⁾	0.63	1.0 ¹⁾	1.6	2.5 ¹⁾	4	6.3	10	16	25	40	
C _V		0.012	0.02	0.03	0.05	0.075	0.12	0.2 ¹⁾	0.3	0.5 ¹⁾	0.75	1.2 ¹⁾	2	3 ¹⁾	5	7.5	12	20	30	47	
Rangeability		15:1	20:1	25:1	35:1	45:1	50:1														
Seat Ø mm		3 (micro-flow valve)								6			12			24		31	38	48	
Travel mm		7.5								15											
DN	NPS	• - Available																			
6	–	•	•	•	•	•	•	•	•												
8	¼	•	•	•	•	•	•	•	•												
10	⅜	•	•	•	•	•	•	•	•												
15	½	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
20	¾									•	•	•	•	•	•						
25	1									•	•	•	•	•	•	•	•				
32	1¼												•	•	•	•	•	•			
40	1½												•	•	•	•	•	•	•		
50	2												•	•	•	•	•	•	•	•	

¹⁾ Special size

Table 4: Permissible differential pressures Δp for Type 3347 Angle Valve with Type 3379 Pneumatic Actuator

The maximum possible pressure and permissible differential pressures Δp depend on which end connections are used (see Table 1.3).

Fail-safe position				Fail-close			Fail-open					
3379 Ø63				2.3 to 3.7 (33.4 to 53.7)	–	–	2.3 to 3.7 (33.4 to 53.7)	2.3 to 3.7 (33.4 to 53.7)	2.3 to 3.7 (33.4 to 53.7)	–	–	–
Bench range in bar (psi) with actuator												
3379 Ø90				–	2.5 to 4.0 (36.3 to 58)	3.3 to 5.6 (47.9 to 81.2)	–	–	–	1.0 to 1.9 (14.5 to 27.6)	1.0 to 1.9 (14.5 to 27.6)	1.0 to 1.9 (14.5 to 27.6)
Required supply pressure to open valve in bar (psi)				4 (58)	4.5 (65.3)	6 (87)	–	–	–	–	–	–
Required supply pressure to close valve in bar (psi)				–	–	–	4 (58)	5 (72.5)	6 (87)	4 (58)	5 (72.5)	6 (87)
DN	K _{VS}	Rated travel	Piston diameter	Δp when $p_2 = 0$ in bar and psi								
6 to 15	0.01 to 0.25	7.5	63	40 (580)	–	–	–	40 (580)	–	–	–	–
15 to 25	0.4 to 1.0	15	63	40 (580)	–	–	–	20 (290)	40 (580)	–	–	–
15 to 50	1.6 to 4.0	15	63	35 (508)	–	–	–	10 (145)	30 (435)	–	–	–
15 to 50	1.6 to 4.0	15	90	–	40 (580)	–	–	–	–	40 (580)	–	–
25 to 50	6.3 to 10	15	90	–	16 (232)	35 (508)	–	–	–	20 (290)	30 (435)	40 (580)
32 to 50	16	15	90	–	12 (174)	20 (290)	–	–	–	11 (160)	19 (276)	28 (406)
40, 50	25	15	90	–	7 (102)	13 (189)	–	–	–	7 (102)	12 (174)	18 (261)
50	40	15	90	–	–	8 (116)	–	–	–	–	7 (102)	10 (145)

Table 5: Dimensions and weights**Table 5.1:** Welding ends · All dimensions in mm

Installation lengths of special versions available on request

Valve	DN ¹⁾	6 (10.2)	8 (13.5)	10 (17.2)	15 (21.3)	20 (26.9)	25 (33.7)	32 (42.4)	40 (48.3)	50 (60.3)	
	NPS	¼	—	⅜	½	¾	1	1¼	1½	2	
DIN 11866, Series A (DIN 11850 Series 2)	L (cast)	—					50	56	67	72	
	L (bar stock)	—			70	70	70	70	70	85	
	L (bar stock, micro)	50	50	50	50	—					
	Øext	8	10	13	19	23	29	35	41	53	
	e	1.0	1.0	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
DIN 11866 Series B	L (cast)	—					55	66	70	82	
	L (bar stock)	—			70	70	70	70	70	85	
	L (bar stock, micro)	50	50	50	50	—					
	Øext	10.2	13.5	17.2	21.3	26.9	33.7	42.4	48.3	60.3	
	e	1.6	1.6	1.6	1.6	1.6	2.0	2.0	2.0	2.0	
DIN 11866 Series C, ASME BPE	L (cast)	—					55	—	70	82	
	L (bar stock)	—			70	70	70		70	85	
	L (bar stock, micro)	40	—	50	50	—					
	Øext	6.35	—	9.53	12.7	19.05	25.4	—	38.1	50.8	
	e	0.89	—	0.89	1.65	1.65	1.65		1.65	1.65	1.65
ISO 2037	L (cast)	—		—			55	66	70	82	
	L (bar stock)						70	70	70	85	
	L (bar stock, micro)			50	50	—					
	Øext			12	17.2	21.3	25	33.7	38	51	
	e			1	1	1	1.2	1.2	1.2	1.2	
JIS G 3447	L (cast)	—					55	66	70	82	
	L (bar stock)						70	70	70	85	
	L (bar stock, micro)						—				
	Øext						25.4	31.8	38.1	50.8	
	e						1.2	1.2	1.2	1.5	
JIS G 3459	L (cast)	—					55	66	70	82	
	L (bar stock)	—			70	70	70	70	70	85	
	L (bar stock, micro)	50	50	50	50	—					
	Øext	10.5	13.8	17.3	21.7	27.2	34	42.7	48.6	60.5	
	e	1	1.2	1.2	1.65	1.65	1.65	1.65	1.65	1.65	

¹⁾ Values in parentheses according to DIN 11866 Series B

Table 5.2: *Clamp connections · All dimensions in mm*

Installation lengths of special versions available on request

Valve	DN ¹⁾	6 (10.2)	8 (13.5)	10 (17.2)	15 (21.3)	20 (26.9)	25 (33.7)	32 (42.4)	40 (48.3)	50 (60.3)	
	NPS	¼	–	⅜	½	¾	1	1¼	1½	2	
DIN 11864-3 Form A, Series A	L (cast)	–		–			60.3	60.3	69.9	88.9	
	L (bar stock)			–	60.3	60.3	60.3	60.3	69.9	88.9	
	L (bar stock, micro)			50	50	–					
	Øext			34	34	50.5	50.5	50.5	64	77.5	
	Øint			10	16	20	26	32	38	50	
DIN 11864-3 Form A, Series B	L (cast)	–		–			60.3	60.3	69.9	88.9	
	L (bar stock)			–	60.3	60.3	60.3	60.3	69.9	88.9	
	L (bar stock, micro)			50	50	–					
	Øext			34	34	50.5	50.5	64	64	91	
	Øint			10.3	18.1	23.7	29.7	38.4	44.3	56.3	
DIN 11864-3 Form A, Series C	L (cast)	–		–			60.3	–	69.9	88.9	
	L (bar stock)			60.3	60.3	60.3	69.9		88.9		
	L (bar stock, micro)			50	–				–		
	Øext			34	34	50.5	64		77.5		
	Øint			9.4	15.75	22.1	34.8		47.5		
DIN 32676 Series A	L (cast)	–					60.3	60.3	69.9	88.9	
	L (bar stock)	–			60.3	60.3	60.3	60.3	69.9	88.9	
	L (bar stock, micro)	50	50	50	50	–					
	Øext	25	25	34	34	34	50.5	50.5	50.5	64	
	Øint	6	8	10	16	20	26	32	38	50	
DIN 32676 Series B	L (cast)	–					60.3	60.3	69.9	88.9	
	L (bar stock)	–			60.3	60.3	60.3	60.3	69.9	88.9	
	L (bar stock, micro)	50	50	50	50	–					
	Øext	25	25	25	50.5	50.5	50.5	64	64	77.5	
	Øint	7.0	10.3	14.0	18.1	23.7	29.7	38.4	44.3	56.3	
DIN 32676 Series C	L (cast)	–					60.3	–	69.9	88.9	
	L (bar stock)	–			60.3	60.3	60.3		69.9	88.9	
	L (bar stock, micro)	40	–	50	50	–			–		
	Øext	25	–	25	25	25	50.5		50.5	64	
	Øint	4.75	–	7.75	9.4	15.75	22.1		34.8	47.5	
ISO 2852	L (cast)	–		–			60.3	60.3	69.9	88.9	
	L (bar stock)			–	60.3	60.3	60.3	60.3	69.9	88.9	
	L (bar stock, micro)			50	50	–					
	Øext			34	34	34	50.5	50.5	50.5	64	
	Øint			10	15.2	19.3	22.6	31.3	35.6	48.6	
ASME BPE	L (cast)	–					60.3	–	69.9	88.9	
	L (bar stock)	–			60.3	60.3	60.3		69.9	88.9	
	L (bar stock, micro)	40	–	50	50	50	–		–		
	Øext	25	–	25	25	25	50.5		50.5	64	
	Øint	4.75	–	7.75	9.4	15.75	22.1		34.8	47.5	
BS 4825 Part 3	L (cast)			–			60.3	–	69.9	88.9	
	L (bar stock)						50.5		50.5	64	
	Øext										
	Øint										22.2
OSS for pipes acc. to JIS G 3447	L (cast)			–			60.3	60.3	69.9	88.9	
	L (bar stock)						50.5	50.5	50.5	64	
	Øext										
	Øint										23
OSS for pipes acc. to JIS G 3459	L (cast)			–			60.3	60.3	69.9	88.9	
	L (bar stock)						50.5	50.5	50.5	64	
	Øext										
	Øint										30.7

¹⁾ Values in parentheses according to DIN 11864-3 Form A, Series B and DIN 32676 Series B

Table 5.3: Threaded couplings · All dimensions in mm

Installation lengths of special versions available on request

Valve	DN ¹⁾	6 (10.2)	8 (13.5)	10 (17.2)	15 (21.3)	20 (26.9)	25 (33.7)	32 (42.4)	40 (48.3)	50 (60.3)
	NPS	¼	–	⅜	½	¾	1	1¼	1½	2
DIN 11864-1 Form A, Series A and DIN 11887 connection A, Series 1	L (cast)	–	–				64	70	80	85
	L (bar stock)		–	64	64	64	70	80	85	
	L (bar stock, micro)		50	50	–					
	Ø _{ext}		RD 28 x ⅛	RD 34 x ⅛	RD 44 x ⅛	RD 52 x ⅛	RD 58 x ⅛	RD 65 x ⅛	RD 78 x ⅛	
	Ø _{int}		10	16	20	26	32	38	50	
DIN 11864-1 Form A, Series B	L (cast)	–	–				64	70	80	85
	L (bar stock)		64	64	64	70	80	85		
	L (bar stock, micro)		50	–						
	Ø _{ext}		RD 44 x ⅛	RD 52 x ⅛	RD 58 x ⅛	RD 65 x ⅛	RD 78 x ⅛	RD 95 x ⅛		
	Ø _{int}		18.1	23.7	29.7	38.4	44.3	56.3		
DIN 11864-1 Form A, Series C	L (cast)	–	–	–	–	64	–	80	85	
	L (bar stock)					RD 52 x ⅛		RD 65 x ⅛	RD 78 x ⅛	
	Ø _{ext}					22.1		34.8	47.5	
	Ø _{int}									
ISO 2853 (IDF)	L (cast)	–	–	–	–	55	66	70	82	
	L (bar stock)					64	70	80	85	
	Ø _{ext}					37.1 x ⅛	45.9 x ⅛	50.6 x ⅛	64.1 x ⅛	
	Ø _{int}					22.6	31.3	35.6	48.6	
SMS 1146	L (cast)	–	–	–	–	55	66	70	82	
	L (bar stock)					RD 40 x ⅛	RD 48 x ⅛	RD 60 x ⅛	RD 70 x ⅛	
	Ø _{ext}									
	Ø _{int}					22.6	29.6	35.6	48.6	


¹⁾ Values in parentheses according to DIN 11864-1 Form A, Series B**Table 5.4: Flanges · All dimensions in mm**

Installation lengths of special versions available on request

Valve	DN ¹⁾	6 (10.2)	8 (13.5)	10 (17.2)	15 (21.3)	20 (26.9)	25 (33.7)	32 (42.4)	40 (48.3)	50 (60.3)	
	NPS	¼	–	⅜	½	¾	1	1¼	1½	2	
DIN 11864-2 Form A, Series A	L (cast)	–	–	–	90	95	100	105	115	125	
	L (bar stock)			70	90	–					
	L (bar stock, micro)					–					
	Øint			10	16	20	26	32	38	50	
DIN 11864-2 Form A, Series B	L (cast)	–	–	–	90	95	100	105	115	125	
	L (bar stock)			70	90	–					
	L (bar stock, micro)					–					
	Øint			14.0	18.1	23.7	29.7	38.4	44.3	56.3	
DIN 11864-2 Form A, Series C	L (cast)	–	–	–	90	95	100	–	115	125	
	L (bar stock)				90	–			–	–	
	L (bar stock, micro)					–					
	Øint				9.4	15.75	22.1		38.8	47.5	

¹⁾ Values in parentheses according to DIN 11864-2 Form A, Series B

Dimensions

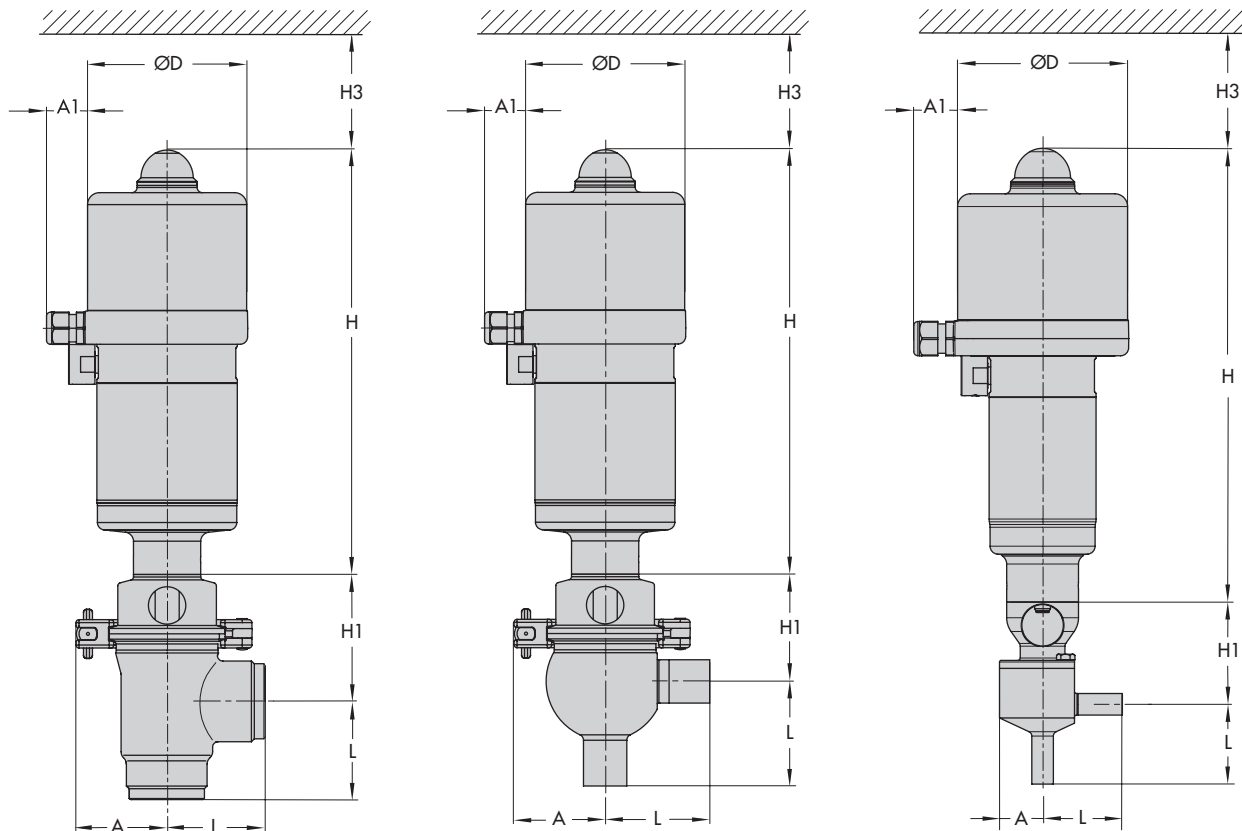

Type 3347/3379/3724 Control Valve with welding ends

Version with cast body


Type 3347/3379/3724 Control Valve with welding ends

Version with bar stock body

Type 3347/3379/3724 Control Valve with welding ends

Micro-flow valve version

End connections

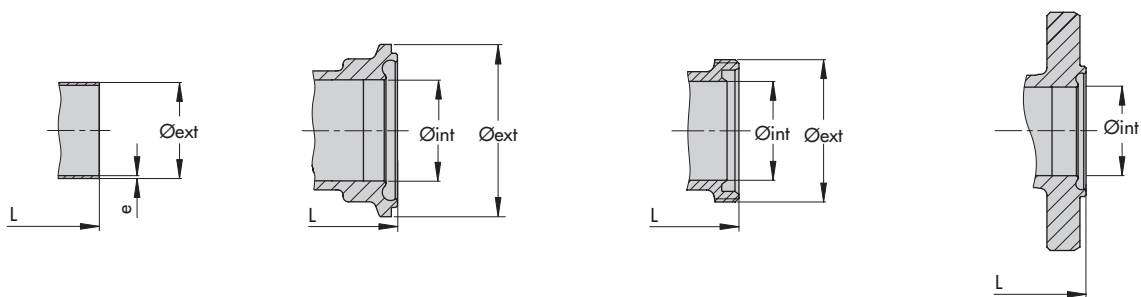


Welding ends

Clamp connections

Threaded couplings

Flanges



Steam line connection, G 1/4 connections (not for version compliant with EHEDG regulations)

Table 5.5: General and weights · All dimensions in mm and all weights in kg

Valve	DN ¹⁾		6 (10.2)	8 (13.5)	10 (17.2)	15 (21.3)	20 (26.9)	25 (33.7)	32 (42.4)	40 (48.3)	50 (60.3)
	NPS		–	¼	⅜	½	¾	1	1¼	1½	2
A (clamped bonnet)	Cast		–					70	80	80	90
	Bar stock		–			80	80	80	80	80	90
Height H1	Cast with clamped bonnet		–					72	69	79	87
	Bar stock	Clamped bonnet				81	78	73	75	80	87
		Flanged bonnet				81	78	73	75	80	88
	Micro-flow (bar stock) with flanged bonnet		66	66	64	61	–				
E (steam line con- nection)	Cast		–					162	164	164	164
	Bar stock		–			164	164	164	164	164	164
Valve weight · Body with welding ends											
Cast with clamped bonnet		–					1.5	2.0	2.5	3.7	
Bar stock	Clamped bonnet				3.0	2.9	2.7	3.1	3.2	4.2	
	Flanged bonnet				2.9	2.8	2.7	3.0	3.1	4.3	
Micro-flow (bar stock) with flanged bonnet		0.9	0.9	0.9	0.9	–					

¹⁾ Values in parentheses according to DIN 11866 Series B and DIN 11884-1 Form A, Series B

Table 5.6: Dimensions and weights for Type 3379 Pneumatic Actuator with Type 3724 Positioner

Piston diameter ØD	mm	63	90
Actuator area	cm ²	31	63
Height H	mm	285	285
Height H3	mm	200	200
Length A1	mm	30	30
Weight	(approx. kg)	3.7	4.7

Ordering text

Pneumatic control valve	DN .../NPS ...	Body surface finish	Polished outsides and/or insides
Materials according to	DIN/ANSI/AFNOR		R _a according to Table 1.1
End connections according to Table 1.2	Welding ends	Actuator	Type 3379
	Threaded couplings	Actuator area	... cm ²
	Clamp connections	Bench range	... bar
	Flanges	Fail-safe position	Fail-close or fail-open
Flow coefficient	K _{VS} .../C _V ...	Additional equipment	Type 3724 Positioner (Data Sheet ► T 8395)
Characteristic	Equal percentage/linear		
Seat/plug seal	Metal seal Soft seal		
Steam line connection	With or without (not for version compliant with EHEDG regulations)		

Specifications subject to change without notice



SAMSON AG · MESS- UND REGELTECHNIK
Weismüllerstraße 3 · 60314 Frankfurt am Main, Germany
Phone: +49 69 4009-0 · Fax: +49 69 4009-1507
samson@samson.de · www.samson.de

T 8097-3 EN